






YGP 系列辊道用变频调速
三相异步电动机技术数据

型 号	标称功率 (kW)	额定电流 (A)	额定转矩 (N·M)	堵转转矩 额定转矩	最大转矩 额定转矩	转动惯量 (KG·M ²)	输出特性	重 量 (KG)
YGP112L-4	2.2	4.9	14.0	2.2	2.5	0.0166	3~50Hz 恒转矩 50~100Hz 恒功率 电压-频率特性  转矩-频率特性 	90
YGP132M1-4	3	6.2	19.1			0.0251		110
YGP132M2-4	4	9.2	25.5			0.0333		120
YGP160S-4	5.5	11.3	35.0			0.1140		180
YGP160L1-4	7.5	15	47.8			0.1140		210
YGP160L2-4	11	21.8	70.7			0.1400		230
YGP180L-4	15	30	95.5	2.5	3.0	0.294		300
YGP200L1-4	18.5	35	118			0.566		400
YGP200L2-4	22	43	140			0.632		420
YGP225M-4	25	47	159			1.10		580
YGP250M1-4	30	58	191			2.57		650
YGP250M2-4	37	70	236			2.57		680
YGP280L1-4	45	83	350			5.12		930
YGP280L2-4	55	99	477			6.95		1150
YGP315S-4	75	135	573			9.60		1300
YGP315M1-4	90	160	700			11.4		1400
YGP315M2-4	110	195	840			12.5		1490
YGP112L-6	1.1	2.8	10.5	2.2	2.5	0.0166		90
TZP132M1-6	2.2	4.9	21.0			0.0251		110
YGP132M2-6	3	7.1	28.7			0.0333		120
YGP160S-6	4	8.8	38.2			0.1140		180
YGP160L1-6	5.5	12	52.5			0.1140		210
YGP160L2-6	7.5	16.3	71.6			0.1400		230
YGP180L-6	11	22.8	105			0.294		300
YGP200L1-6	15	31.8	143			0.566		400
YGP200L2-6	18.5	38.4	177	2.5	3.0	0.632		420
YGP225M-6	22	45	210			1.10		580
YGP250M1-6	25	50	239			2.57		650
YGP250M2-6	30	60	287			2.57		680
YGP280L1-6	37	71.6	353			5.12		930
YGP280L2-6	45	87.1	430			6.95		1150
YGP315S-6	55	106.5	525			9.6		1300
YGP315M1-6	75	143.5	716			11.4		1400
YGP315M2-6	90	172.2	860			12.5		1490
YGP355L1-6	110	199	1051			18.6		1700
YGP355L2-6	132	238.9	1261			22.2		1750
YGP355L3-6	160	286.5	1528			25.6		1800
YGP180L-8	7.5	19	95.5	2.2	2.5	0.294	2.5	300
YGP200L1-8	11	27.3	140	2.5	3.0	0.566		400
YGP200L2-8	13	31.5	165.6			0.632		420
YGP225M-8	15	35.9	191			1.10		580
YGP250M1-8	18.5	41.2	236			2.57		650
YGP250M2-8	22	50	280			2.57		680
YGP280L1-8	30	68.1	382			5.12		930
YGP280L2-8	37	84	471			6.95		1150
YGP315S-8	45	100.8	573			9.60		1300
YGP315M1-8	55	122	700			11.4		1400
YGP315M2-8	75	161.1	955			12.5		1490
YGP355L1-8	90	174.4	1146			18.6		1700
YGP355L2-8	110	213.7	1401			22.2		1750
YGP355L3-8	132	255.7	1681			25.6		1800

YGP 系列辊道用变频调速三相异步电动机外形及安装尺寸


IMB3 型

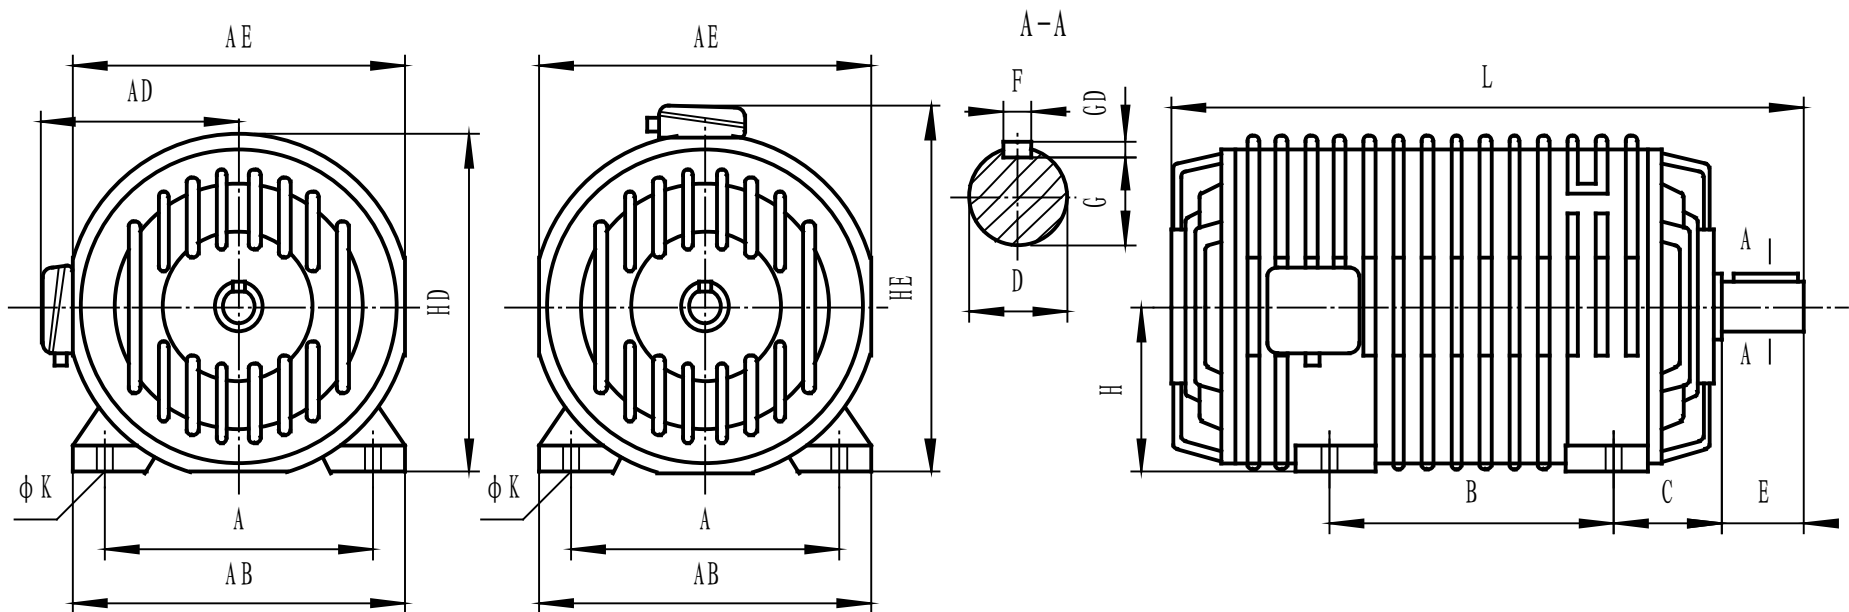

(mm)

机座号	安 装 尺 寸											外 形 尺 寸						
	A	B	C	D		E	F	G	GD	H	K	AB	AE	AD	HE	HD	L	
112L	190	159	70	32	k6 ($\begin{smallmatrix} +0.018 \\ +0.002 \end{smallmatrix}$)	80	10	27	8	112	12	245	235	205	—	240	460	
132M	216	178	89	38				33		132		265	260	220	—	265	520	
160S	254		108	48		110	14	42.5	9	160	15	315	315	250	—	325	650	
160L		254															700	
180L	279	279	121	55	m6 ($\begin{smallmatrix} +0.030 \\ +0.011 \end{smallmatrix}$)		140	16	49	10	180	19	360	355	295	—	365	750
200L	318	305	133	65				18	58	11	200		415	410	320	—	415	860
225M	356	311	149	75		20		67.5	12	225	470		455	335	—	460	950	
250M	406	349	168	80		m6 ($\begin{smallmatrix} +0.030 \\ +0.011 \end{smallmatrix}$)	170	22	71	14	250	24	520	500	—	615	505	990
280M	457	419	190	85	76				280		565		560	—	720	565	1100	
280L		457																

IMB5 型

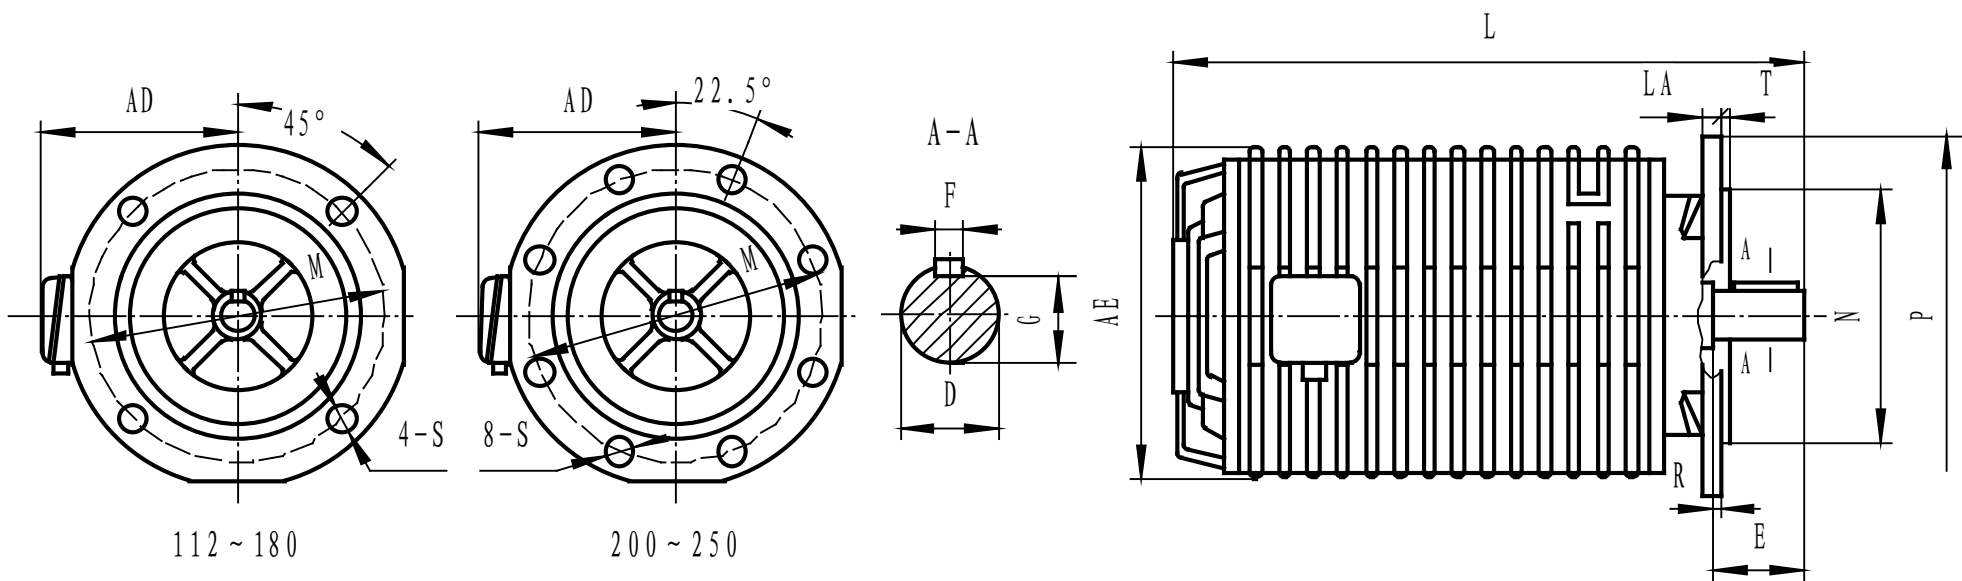

(mm)

机座号	安 装 尺 寸												外 形 尺 寸			
	D		E	F	G	M	N	P	R		S	T	AE	AD	LA	L
112L	32	k6 ($\begin{smallmatrix} +0.018 \\ +0.002 \end{smallmatrix}$)	80	10	27	215	180	250	0	± 2.0	15	4.0	235	205	12	460
132M	38				33	265	230	300					260	220	12	520
160S	48		110	14	42.5	300	250	350		± 3.0	19	5.0	310	250	14	650
160L													700			
180L	55	m6 ($\begin{smallmatrix} +0.030 \\ +0.011 \end{smallmatrix}$)	140	16	49	400	350	450		355			295	16	750	
200L	65			18	58					410			320	18	860	
225M	75			20	67.5					455			335	18	950	
250M	80			22	71	500	450	550	510	360			22	990		

以上数据仅供参考，具体数据允有变动，恕不另行通知，如有疑问请与我公司联系。