




YG 系列辊道用三相异步电动机技术数据

机座号	极数	功率 (kW)	堵转转矩 (N·m)		堵转电流 (A)	动态常数 (kg·m ² /h)	机座号	极数	功率 (kW)	堵转转矩 (N·m)		堵转电流 (A)	动态常数 (kg·m ² /h)
		YG b	YGa	YG b	YGa	YGa			YG b	YGa	YG b	YGa	YGa
112L1	4	1.2	22	20	13	99	112L1	12	0.30	—	12	—	—
112L2	4	1.8	36	32	19	130	112L2	12	0.45	22	18	5.3	990
112L1	6	0.85	22	20	8.5	205	132M1	12	0.63	36	26	8.0	1050
112L2	6	1.25	34	28	12	280	132M2	12	0.95	53	38	11	1300
132M1	6	1.8	50	42	18	300	160S1	12	1.3	75	56	15	1550
132M2	6	2.4	71	60	27	375	160S2	12	1.8	105	80	20	1910
112L1	8	0.5	17	15	5.6	335	160L1	12	2.6	140	110	26	2400
112L2	8	0.85	28	25	9	470	160L2	12	3.4	190	150	34	2880
132M1	8	1.25	42	36	12	510	180L1	12	4.2	250	200	12	3340
132M2	8	1.8	60	50	17	640	180L2	12	5.0	320	260	53	3860
160S1	8	2.5	80	71	22	770	200L1	12	6.3	400	320	63	4290
160S2	8	3.4	110	100	30	950	200L2	12	8.0	500	400	80	5040
160L1	8	4.5	150	140	40	1160	225M1	12	—	630	—	100	5050
160L2	8	5.6	210	190	56	1380	132M1	16	0.36	—	20	—	—
180L1	8	6.7	280	240	67	1540	132M2	16	0.50	—	30	—	—
180L2	8	—	—	300	—	—	160S1	16	0.71	50	42	9.5	2500
112L1	10	0.36	16	13	4.5	490	160S2	16	1.0	75	60	13	3050
112L2	10	0.53	25	20	7.5	660	160L1	16	1.5	105	80	18	3990
132M1	10	0.85	38	30	9	740	160L2	16	2.0	140	110	24	4640
132M2	10	1.25	56	45	13	930	180L1	16	2.5	190	150	30	5270
160S1	10	1.8	80	63	18	1150	180L2	16	3.0	250	190	38	6260
160S2	10	2.4	110	90	24	1380	200L1	16	4.2	320	250	50	7100
160L1	10	3.2	150	120	32	1760	200L2	16	5.3	420	340	63	8100
160L2	10	4.2	200	160	40	2120	225M1	16	6.7	530	450	80	8310
180L1	10	—	250	—	48	2350	225M2	16	8.5	670	600	100	9460
180L2	10	5.6	320	250	60	2690	180L2	20	1.4	—	130	—	—
200L1	10	7.1	400	320	75	3050	200L1	20	2.2	250	180	36	9750
200L2	10	9	500	400	95	3530	200L2	20	3.2	340	250	78	11150
225M1	10	11	630	500	125	3550	225M1	20	4.0	450	340	63	11760
225M2	10	14	800	630	150	4050	225M2	20	4.8	560	450	80	13300


YG 系列辊道用三相异步电动机外形及安装尺寸

IMB3 型

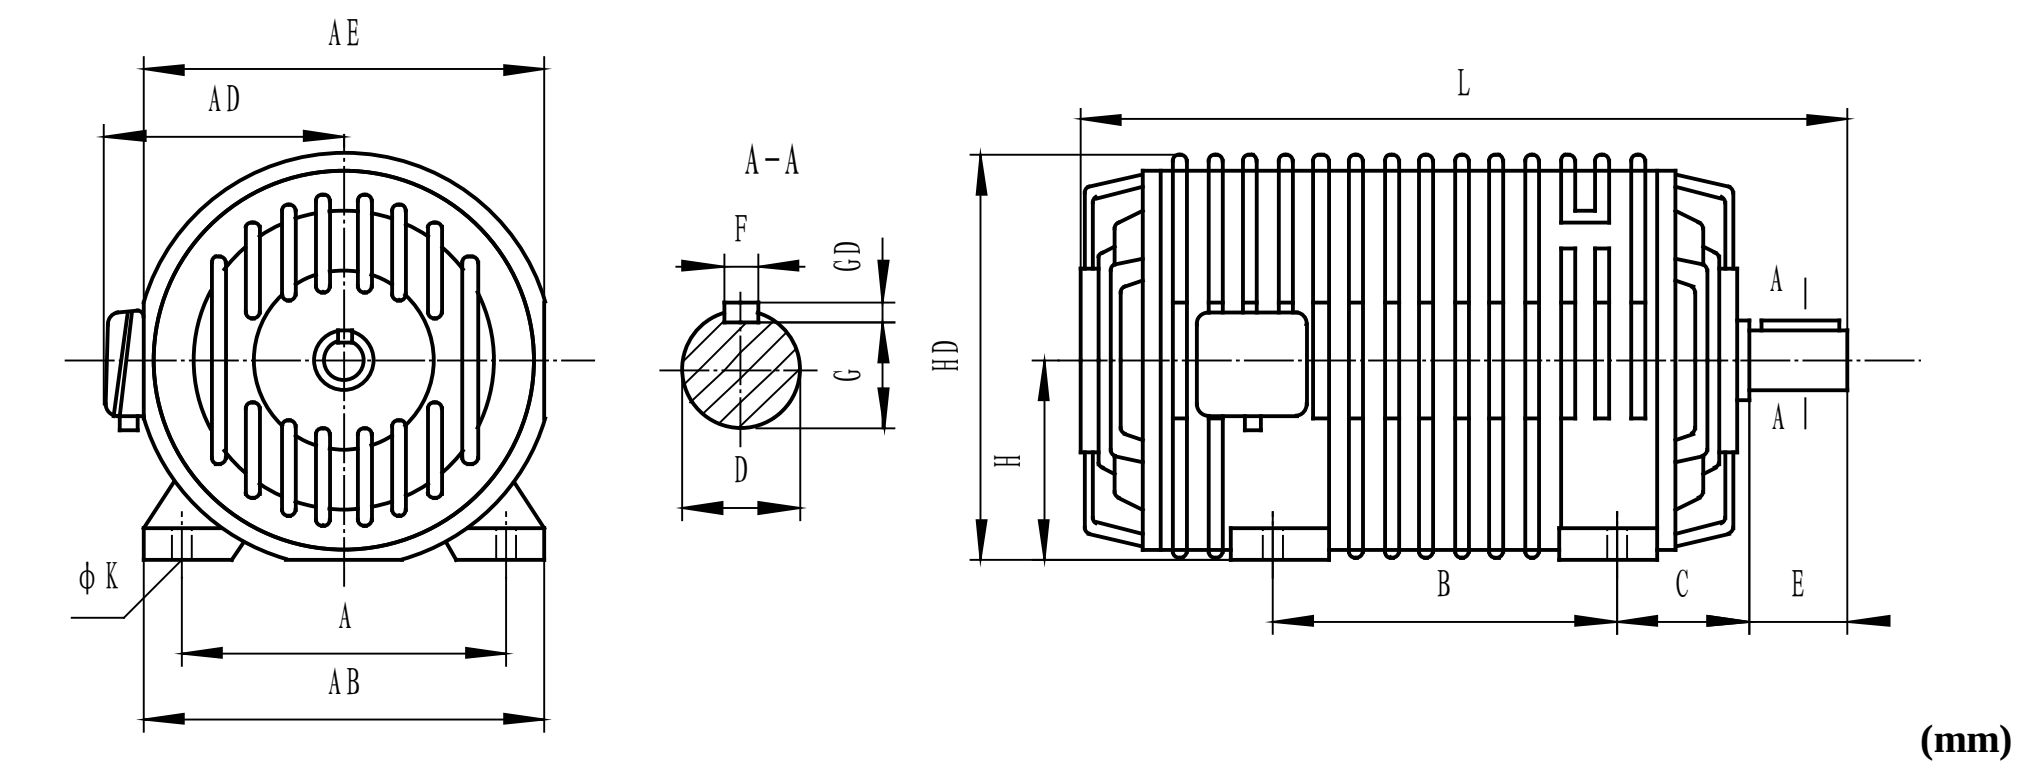

机座号	安 装 尺 寸											外 形 尺 寸				
	A	B	C	D		E	F	G	GD	H	K	AB	AE	AD	HD	L
112L	190	159	70	32	k6 ($\begin{smallmatrix} +0.018 \\ +0.002 \end{smallmatrix}$)	80	10	27	8	112	12	235	240	205	240	445
132M	216	178	89	38				33		132		265	265	220	265	495
160S	254		108	48		110	14	42.5	9	160	15	315	315	250	320	570
160L		254														690
180L	279	279	121	55	m6 ($\begin{smallmatrix} +0.030 \\ +0.011 \end{smallmatrix}$)		140	16	49	10		180	19	360	360	295
200L	318	305	133	65		18		58	11	200	415	415		320	415	780
225M	356	311	149	75		20		67.5	12	225	470	470		335	465	835

IMB5 型

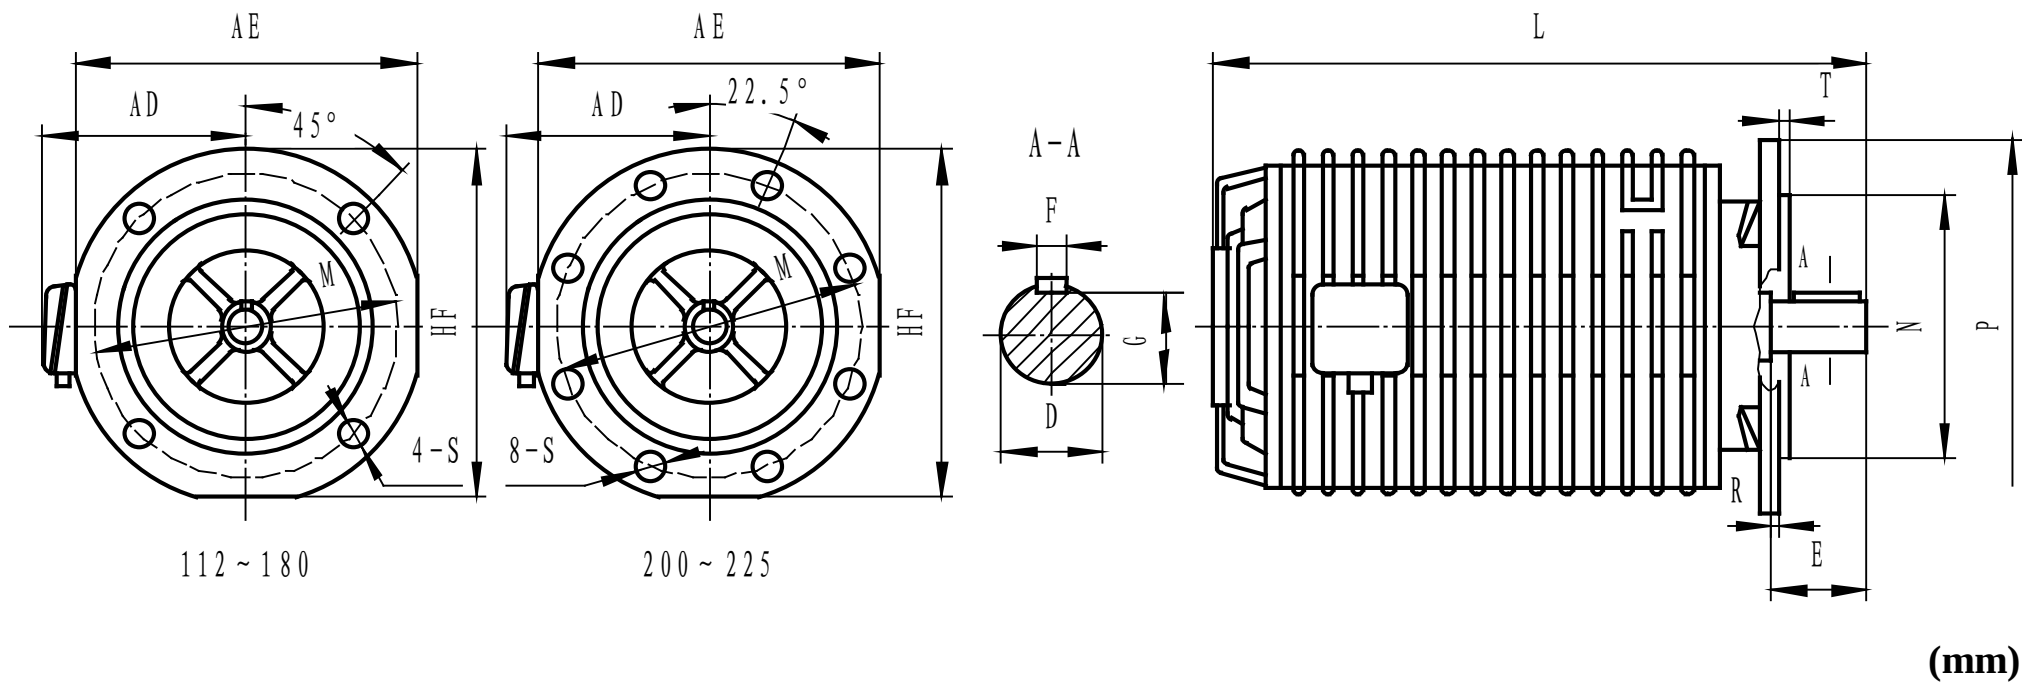

机座号	安 装 尺 寸												外 形 尺 寸			
	D		E	F	G	M	N	P	R		S	T	AE	AD	HF	L
112L	32	k6 ($\begin{smallmatrix} +0.018 \\ +0.002 \end{smallmatrix}$)	80	10	27	215	180	250	0	± 2.0	15	4.0	240	205	240	445
132M	38				33	265	230	300					265	220	285	495
160S	48		110	14	42.5	300	250	350		± 3.0	19	5.0	315	250	335	570
160L					67.5								360	295	355	690
180L	55	m6 ($\begin{smallmatrix} +0.030 \\ +0.011 \end{smallmatrix}$)	140	16	49	400	350	450		± 4.0			415	320	450	730
200L	65			18	58								470	335	465	780
225M	75			20	67.5											835

以上数据仅供参考，具体数据允有变动，恕不另行通知，如有疑问请与我公司联系。